


FORD/LAND ROVER/VOLVO AHCM/CPM TTV/TTVEVO WEBASTO CONTINENTAL 9S12DG256 WIRING DIAGRAMS

I/O TERMINAL with this kind of bcm work by default by CAN2 (CAN2H-CAN2L) OBD cable pins 3-11, DB9 connector pins 7-8.
But during bench work in software it is possible to switch to CAN1 (CAN1H-CAN1L) OBD cable 6-14, DB9 connector pins 1-2.

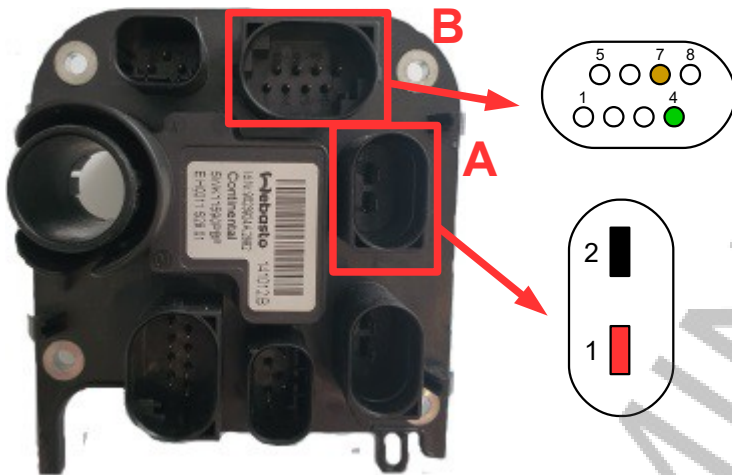

+12V	GND	CANH	CANL
A-1	A-2	B-7	B-4